



## REEF WHITE HONED RECT 120X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040453</b> | 120X120   | 9,10           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                      |                |      |
|----------------------|----------------|------|
| Slip resistance (Rd) | UNE-EN 16165-C | 0.00 |
|----------------------|----------------|------|



## REEF WHITE RECT 120X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A041009</b> | 120X120   | 9,20           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |

## REEF WHITE HONED RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040299</b> | 60x120    | 9,30           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## REEF WHITE RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040305</b> | 60x120    | 8,70           | PC BIA GL |

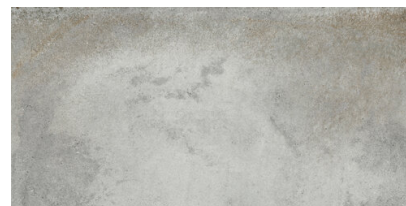

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |



## REEF WHITE RECT 60X60

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040762</b> | 60X60     | 8,30           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |



## MALLA REEF WHITE HONED 36,3X30

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040343</b> | 36,3x30   | 8,90           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES



## M-STICK REEF WHITE HONED 30X30

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040311</b> | 30X30     | 0,00           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

## REEF AQUAMARINE HONED RECT 120X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040454</b> | 120X120   | 9,10           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                      |                |      |
|----------------------|----------------|------|
| Slip resistance (Rd) | UNE-EN 16165-C | 0.00 |
|----------------------|----------------|------|



## REEF AQUAMARINE RECT 120X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A041007</b> | 120X120   | 9,00           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |

## REEF AQUAMARINE HONED RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040300</b> | 60x120    | 8,90           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## REEF AQUAMARINE RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040306</b> | 60x120    | 8,90           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |



## REEF AQUAMARINE RECT 60X60

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040763</b> | 60X60     | 8,50           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |


### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |

## MALLA REEF AQUAMARINE HONED

### 36,3X30

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040344</b> | 36,3x30   | 8,90           | PC BIA GL |

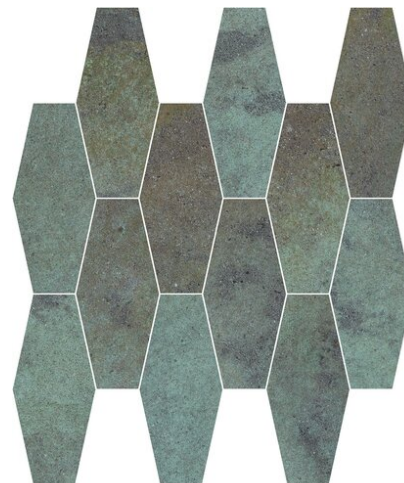

#### DIMENSIONS AND SURFACE PROPERTIES

#### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

#### CHEMICAL PROPERTIES

M-STICK REEF AQUAMARINE  
HONED 30X30

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP     |
|-----------|-----------|----------------|-----------|
| A040312   | 30X30     | 0,00           | PC BIA GL |



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

CHEMICAL PROPERTIES

## REEF OCHER HONED RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040302</b> | 60x120    | 8,90           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## REEF OCHER RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040308</b> | 60x120    | 8,80           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |



## REEF OCHER RECT 60X60

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040764</b> | 60X60     | 8,50           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |


### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |

## MALLA REEF OCHER HONED

### 36,3X30

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040346</b> | 36,3x30   | 8,90           | PC BIA GL |

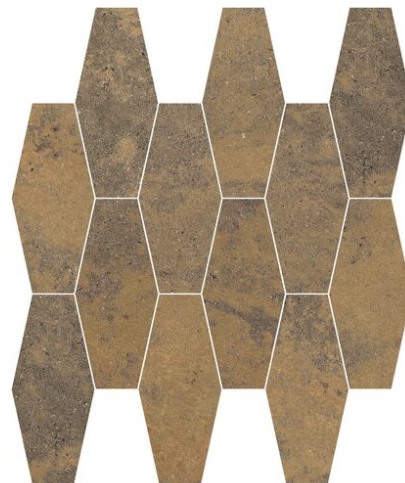

#### DIMENSIONS AND SURFACE PROPERTIES

#### PHYSICAL PROPERTIES


|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

#### CHEMICAL PROPERTIES

## M-STICK REEF OCHER HONED

### 30X30

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040314</b> | 30X30     | 0,00           | PC BIA GL |

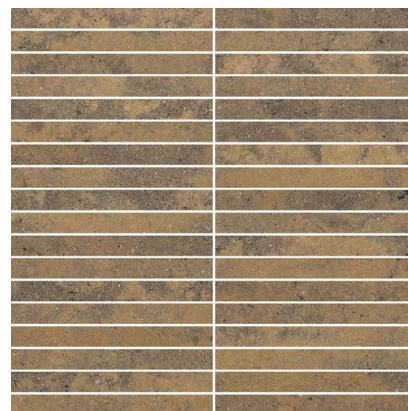

#### DIMENSIONS AND SURFACE PROPERTIES

#### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

#### CHEMICAL PROPERTIES

## REEF CORTEN HONED RECT 120X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040456</b> | 120X120   | 9,10           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                      |                |      |
|----------------------|----------------|------|
| Slip resistance (Rd) | UNE-EN 16165-C | 0.00 |
|----------------------|----------------|------|



## REEF CORTEN RECT 120X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A041008</b> | 120X120   | 9,30           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |

## REEF CORTEN HONED RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040303</b> | 60x120    | 8,80           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## REEF CORTEN RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040309</b> | 60x120    | 8,80           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |



## REEF CORTEN RECT 60X60

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040765</b> | 60X60     | 8,50           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                      |                |         |
|----------------------|----------------|---------|
| Slip resistance (Rd) | UNE-EN 16165-C | Class 2 |
| Slip resistance (R)  | EN 16165-B     | R10     |

## MALLA REEF CORTEN HONED

### 36,3X30

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040347</b> | 36,3x30   | 8,90           | PC BIA GL |



#### DIMENSIONS AND SURFACE PROPERTIES


#### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

#### CHEMICAL PROPERTIES

## M-STICK REEF CORTEN HONED 30X30

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040315</b> | 30X30     | 0,00           | PC BIA GL |

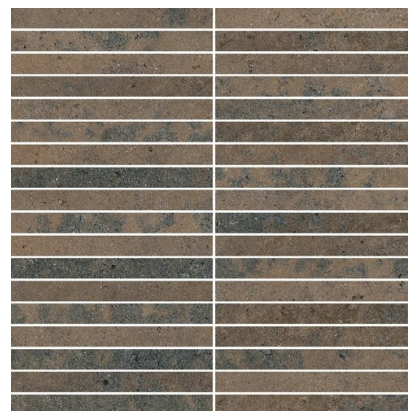

### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES